

"QUATRO" DESIGN



Quatro 100
Quatro 125
Quatro 150



Quatro
Platinum



Quatro
Hi-tech



Quatro
Hi-tech Chrome



Quatro
Hi-tech Gold

■ Use

- Exhaust air fan

■ Application

- Residential premises
- Flats, cottages
- Offices
- Utility spaces
- Trade premises
- Restaurants
- Job sites
- Health care facilities
- Child care facilities

■ Options

Pull-cord switch

Pull-cord switch

Timer

Timer

- Time delay range from 2 to 30 min

Humidity sensor



Humidity

- Humidity level range from 60 to 90%
- Time delay range from 2 to 30 min


■ Features

- Wall and ceiling mounting
- Easy maintenance
- Long continuous work
- Back valve
- Ball bearing motor
- Decoration - metallic (Quatro Platinum), aluminum (Quatro Hi-Tech), chrome (Quatro Chrome), gold (Quatro Gold)
- 5 years guarantee

Type	Pull-cord switch	Timer	Humidity sensor
Quatro 100			
100 S	●		
100 T		●	
100 ST	●	●	
100 H		●	●
100 SH	●	●	●
Quatro 125			
125 S	●		
125 T		●	
125 ST	●	●	
125 H		●	●
125 SH	●	●	●
Quatro 150			
150 S	●		
150 T		●	
150 ST	●	●	
150 H		●	●
150 SH	●	●	●

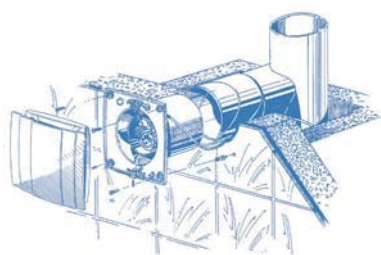


Overall and mounting dimensions

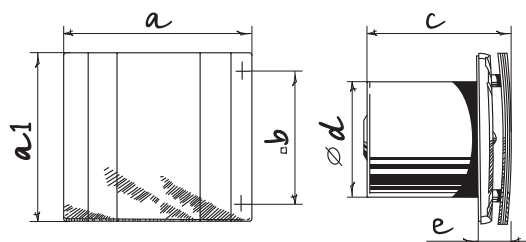

Type	Dimensions [mm]					
	a	a1	b	c	d	e
Quatro 100	171	151	108	128	100	32
Quatro 125	201	178	113	136	125	35
Quatro 150	236	207	165	157	150	38

Technical data

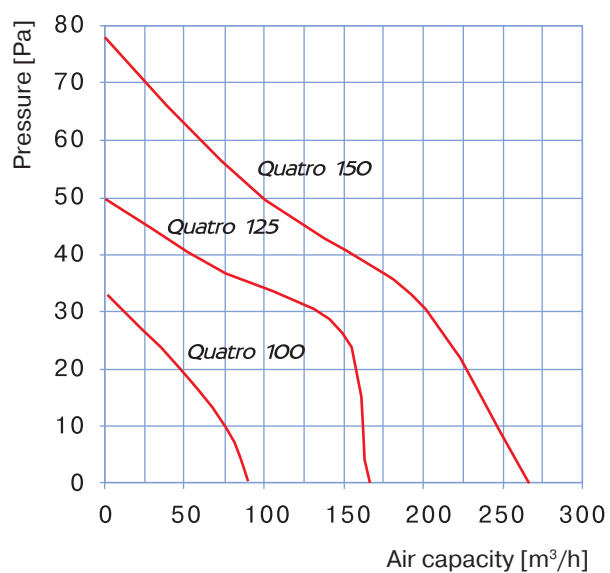

Parameters	Quatro 100	Quatro 125	Quatro 150
Voltage [V]	220-240	220-240	220-240
Power [W]	14	16	24
Air capacity [m³/h]	88	167	265
Noise level [dB(A) 3m]	33	34	37
r.p.m.	2300	2400	2400



Packing

