

**Only 7.5 W
25 dB(A)**



Sileo 100
Sileo 125
Sileo 150


Use

- High efficient exhaust fans with stylish design for new enhanced comfort in bathrooms.

Application

- Residential premises
- Flats, cottages
- Offices
- Utility spaces
- Trade premises
- Restaurants
- Health care facilities
- Child care facilities

- The motor is mounted on special anti-vibration dampers.
- The exhaust pipe incorporates a specially designed air rectifier to reduce the air turbulence, increase pressure and lower the noise level.



- Sileo 150 is equipped with a double-speed motor and Sileo Max 150 is equipped with a double-speed high-power motor.
- The new automation in the models Sileo 150 and Sileo Max 150 enables to set one of five fan operation modes. Changeover to another operation mode is easily performed by setting the DIP switch to a respective position.

Options

Pull-cord switch

Pull-cord switch

Timer

- Turn-off delay timer adjustable from 2 to 30 min.
- Turn-on delay timer adjustable from 0 up to 2 min. (for the models Sileo 150 / Sileo Max 150).

Humidity sensor

- Humidity setpoint adjustable from 60 % up to 90 %.
- Turn-off delay adjustable from 2 up to 30 min.
- Turn-on delay adjustable from 0 up to 2 min. (for the models Sileo 150 / Sileo Max 150).

Motion sensor


- Detection range from 1 up to 4 m.
- Detection angle up to 100°.
- Turn-off delay adjustable from 2 up to 30 min.
- Turn-on delay adjustable from 0 up to 2 min. (for models Sileo 150 / Sileo Max 150).

MAX


- High-powered motor.

Features

- Specially designed mixed-flow impeller profile ensures high air capacity and low noise level.
- Casing and impeller made of quality durable UV-resistant plastic.
- Backdraft damper for back flow prevention.
- The high ingress protection rating of IP 45 makes the fan the ideal solution for the ventilation of bathrooms and shower rooms.
- Low energy demand from 7.5 W due to a new high-efficient motor.






Overall and mounting dimensions

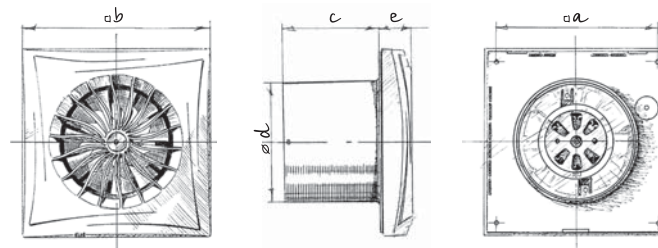

Model	Dimensions [mm]				
	a	b	c	d	e
Sileo 100	136	158	81	100	26
Sileo 125	158	182	91	124	27
Sileo 150	190	214	98	148	32

Technical data

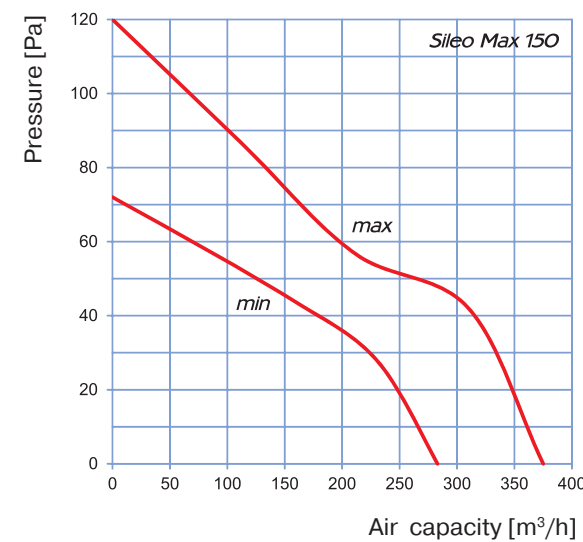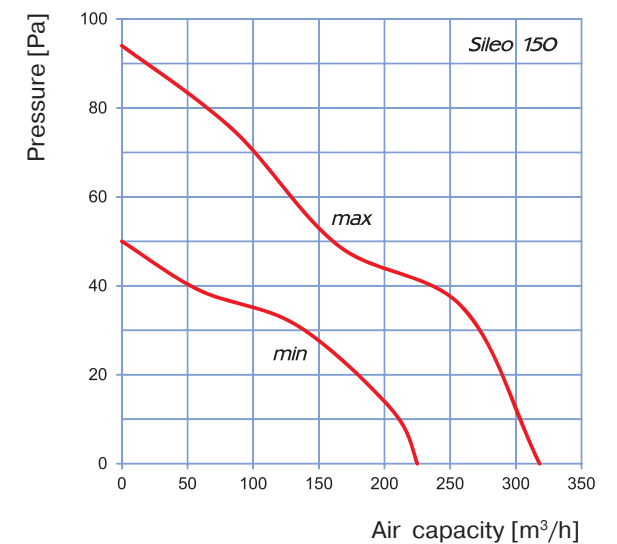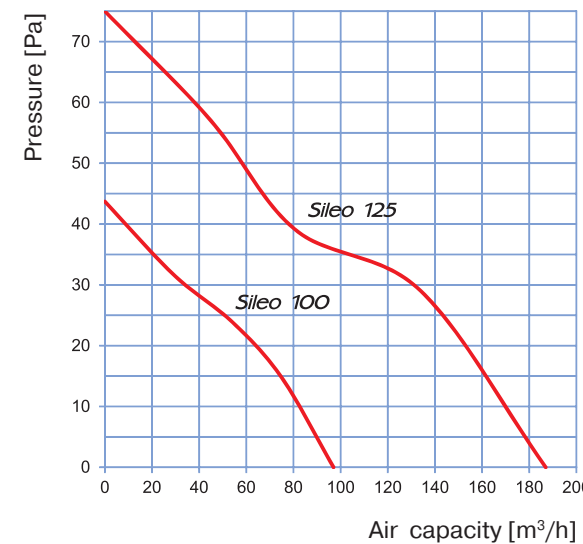

Parameters	Sileo 100	Sileo 125	Sileo 150		Sileo Max 150	
			min.	max.	min.	max.
Voltage [V]	230	230	230		230	
Power [W]	7.5	17	17	19	19	22
Current [A]	0.049	0.11	0.08	0.09	0.09	0.1
Air capacity [m³/h]	97	187	225	318	283	375
Sound pressure level at 3 m [dB(A)]	25	32	28	33	32	38